Safety Cable Kit
Quick Setup Guide

This *Quick Setup Guide* provides step-by-step instructions on how to secure outdoor Ruckus Wireless™ devices using the Safety Cable.

Supported Devices

The devices can be any Ruckus Wireless ZoneFlex™ Access Point using the single-arm (non-sheet metal) mounting.

NOTE:
Ruckus Wireless products must be installed by a professional installer.

Package Contents


- One safety cable
- This *Quick Setup Guide*

Required Tools and Supplies

- Phillips screwdriver
- 7/16" hex socket
- Ratchet wrench
- Torque wrench
- Torque screwdriver

Cabling Instructions


1 Thread the safety cable around the hanger mount and thread the eye end through the loop end.

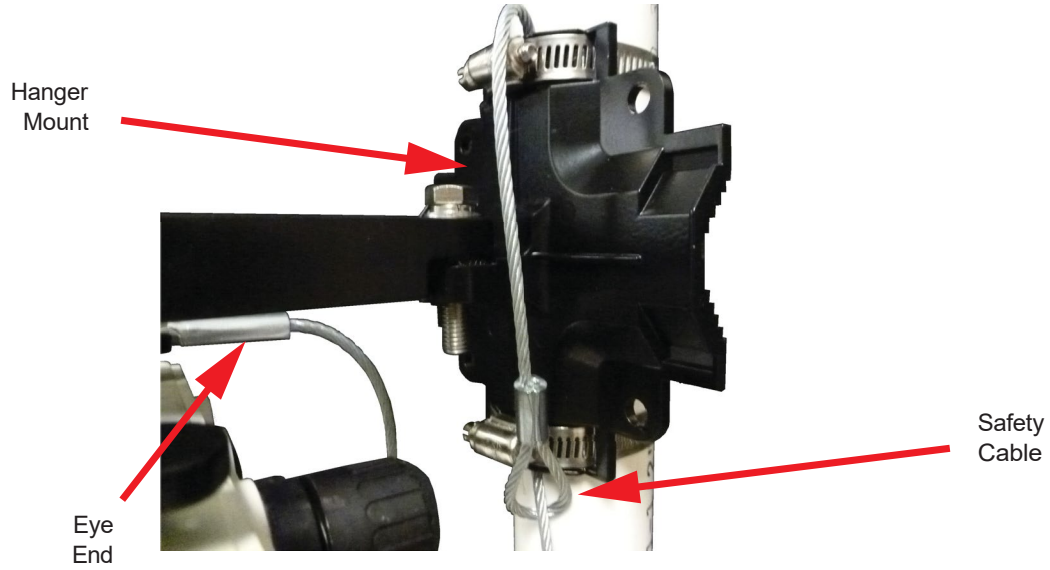

2 Remove one fastener (screw or bolt) from the AP mounting bracket.

3 Push the fastener through the safety cable eye end and reattach the fastener to the AP.

4 Tighten the fastener to secure the AP mounting bracket to the AP. Fastener torque value must be 2.5-3.0 N.m or 22-27 in-lbs.

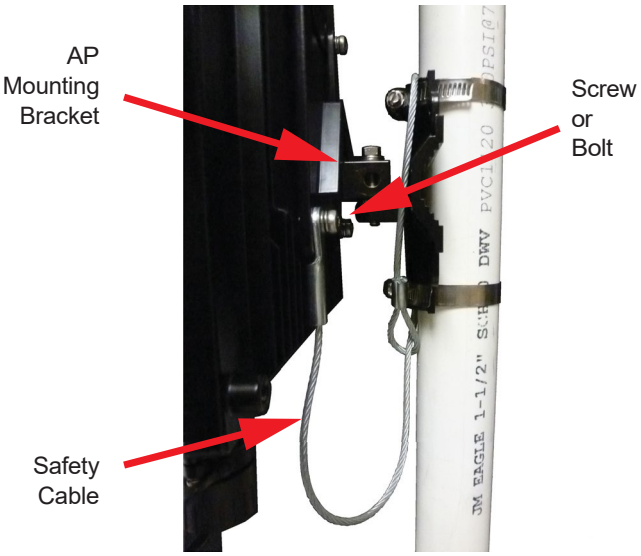

RUCKUS Wireless LLC is a wholly owned subsidiary of Belden, Inc.

Copyright © 2026 Belden, Inc. All rights reserved.
Published November 2026, Part Number 800-70438-001 Rev D